


# Ultrasound investigation of *U*-based intermetallics at low temperatures


Supervisor: Tetiana N.Haidamak, Jan Prokleška, Petr Proschek

Strong correlation between structural, magnetic, and electric properties makes studies of the elastic properties of solids an important direction of experimental condensed-matter physics. Studies of elastic properties provides information about lattice distortions, spontaneous and field-induced phase transitions, crystal-electric-field schemes, and multipole interactions. Data obtained from temperature and field dependencies of elastic moduli makes it possible to map out or to complement existing *H-T* phase diagrams. In MGML laboratory (open access research infrastructure, [www.mgml.eu](http://www.mgml.eu)), ultrasound is a newly introduced technique, complementary to well-established thermal expansion and magnetostriction. One of the main research areas in the MGML is *U*-based intermetallics (which includes  $\text{UIrSi}_3$ ,  $\text{UAu}_2\text{Si}_2$ ,  $\text{UCoGe}$ ,  $\text{UIrGe}$ ,  $\text{UTe}_2$  families). The laboratory has capabilities to grow high-quality single crystals, carry out measurements of a number of physical properties in magnetic fields up to 19.5 T and perform calculations. Modifications in acoustic mounting procedure and redesign of the sample holder are needed for the experiments with the *U*-based intermetallics.

As an example  $\text{UIrSi}_3$  elastic properties were recently studied in static magnetic fields up to 19.5 T (accepted for publication in *Phys. Rev. B*). Some pronounced spin-lattice effects were found and a theoretical model explaining them was proposed.

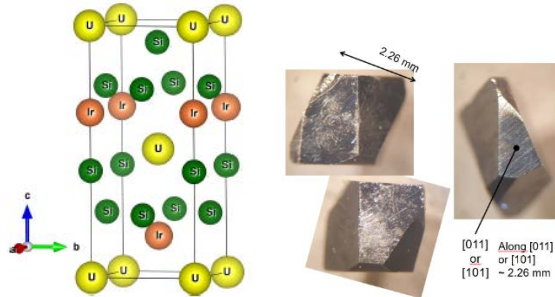

$\text{UIrSi}_3$  tetragonal structure and the polished single crystalline sample [1]

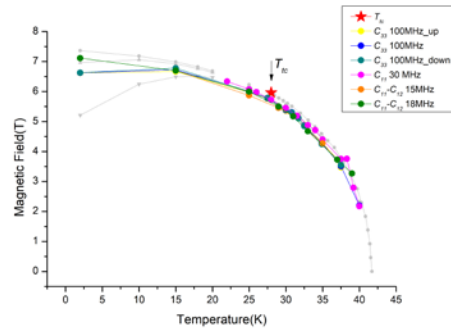

$\text{UIrSi}_3$  phase diagram complimented with acoustic data (grey color existing diagram [1])

The work will consist of the *U*-based single crystals orientation via Laue diffractometer and polishing plan-parallel sides along main crystallographic axis and planes. One would learn the mounting procedure of fragile submillimeter-size samples (transducers, bond, sample mounting, screening, etc.) as well as performing the ultrasound measurements using the pulse-echo technique (PPMS option). A number of experiments to be performed to measure field and temperature dependencies of relative change of sound velocity.

References:

[1] J. Valenta, F. Honda, M. Vališka, P. Opletal, J. Kaštil, M. Míšek, M. Diviš, L. Sandratskii, J. Prchal, and V. Sechovský, *PRB* **97**, 144423 (2018).